

# 530U/T & 533U/T Specifications

## General Dimensions:

Available with inside width of 84" and lengths of 12'-17', in 6" increments. Side dimensions are available from 30" to 54", in 1" increments. End dimensions are available from 40" to 60", in 1" increments.

## Sides:

7 Gauge high tensile steel sides material shedding boxed top rails, full depth 15" rear corner post, immediate horizontal "V" pressed side braces (number depending on side height), 10" front and rear board extension pockets and full length tarp rails.

## Floor:

7 gauge high tensile 50k steel, with 2" floor to side radius.

## Front Bulkhead:

7 gauge high tensile steel construction with two bend top flange and one formed in place intermediate "V" brace.

## Tailgate:

7 gauge high tensile steel construction with 2 intermediate vertical braces with 1 or 2 intermediate horizontal braces depending on gate height. Includes a full width lower tailgate pin.

## Tailgate Hardware:

Heavy duty cast "tarp friendly" top hardware and overshot lower hardware and manual release handle.

## LED Lights:

Meets all requirements of FMVSS108 with oval stop/tail/turn lights recessed in rear corner posts. All lighting is recessed, shock mounted, complete with factory wiring harness.

## Understructure:

Crossmemberless design using 3/16" x 100K formed 11" formed trapezoidal longbeams. Lubricated front and rear cross shafts and full width rear bolster.

## Safety Features:

All complete Galion bodies with hoist are shipped with a "body up" warning light and OSHA required back up alarm.

## Options:

304 #4 stainless steel construction  
304-2B stainless steel construction  
201-LN2B stainless steel construction  
201 #4 stainless steel construction  
Upgrade steel or stainless gauges  
3/16" floor of material choice  
1/4" Hardo 500 Tuf floor  
Various size cab protectors  
Bolt on spreader apron  
Cast HD quick release top hardware or F-latch  
Stainless cross shaft  
Additional side bracing  
Barn door ILO double acting  
High lift tailgate  
Air tailgate

Coal door in gate  
Various size cab protectors  
Additional light holes  
Various hoist options

Galion-Godwin Truck Body Co. LLC.  
7415 Peabody-Kent Rd.  
Dundee OH, 44624  
(877) 450-4794




Pictured is the crossmemberless understructure of the 530 and 533 body using 3/16" X 100K formed 11" trapezoidal longbeams




All hardware on the 533U/T is stainless to promote longevity through corrosion resistance



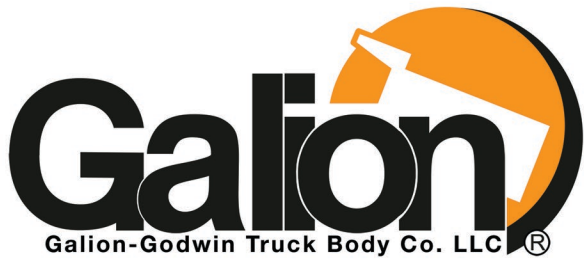


## 530U/T & 533U/T Series Dump Bodies

The Galion 530U/T and 533U/T bodies are excellent for over-the-highway aggregate hauling. It is also ideal for construction and batching work, and for hauling and spreading stone, sand, gravel, and other aggregates. These bodies utilize high tensile steel throughout for best resistance to abrasion. This is the largest of Galion's steel body product line and can be used with underbody or telescopic hoists.

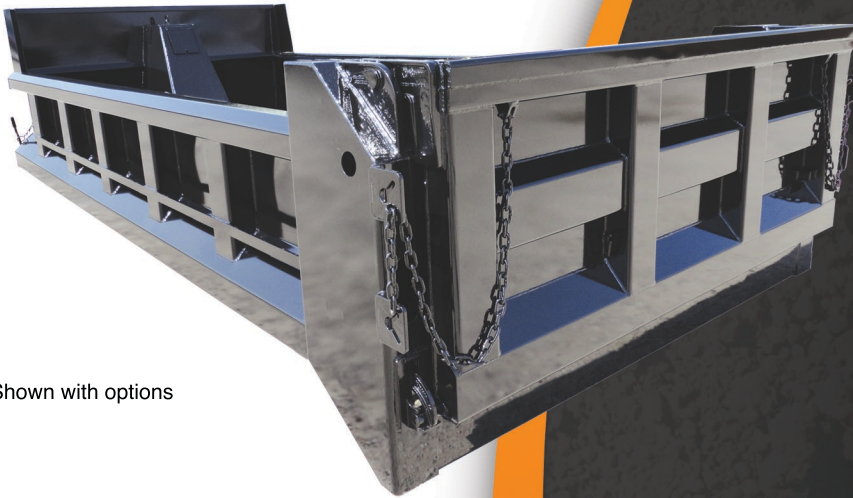

Shown with options

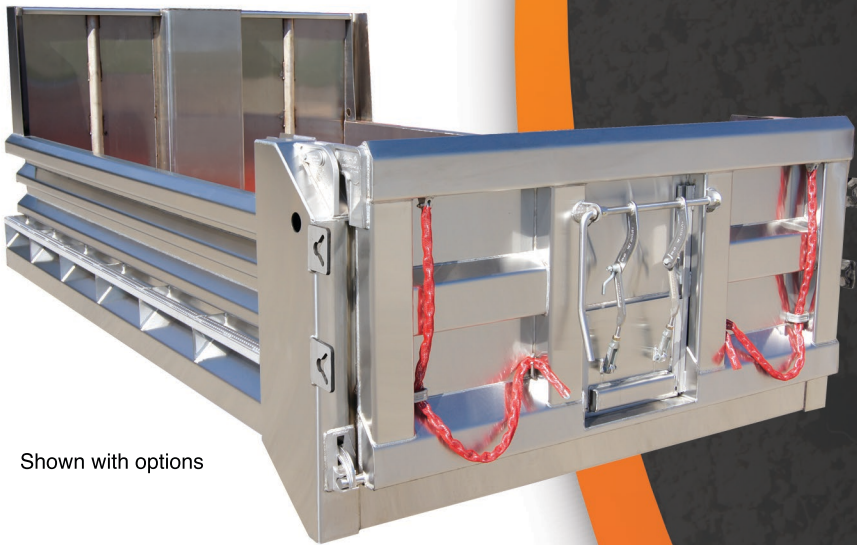

Shown with options

- Available in 12' to 17' lengths
- 7 gauge high tensile 50k steel floor
- Material shedding boxed top rails
- 6 or 9 panel tailgate
- 7 gauge high tensile construction throughout
- Tarp-friendly upper gate hardware
- Full-depth rear corner posts
- Zinc thermoset primer with glossy black powder coated top coat

### Full Factory Warranty

Complete parts and service available through nationwide authorized distributors

[www.GalionGodwin.com](http://www.GalionGodwin.com)

Proud Affiliate of The Godwin Group

